



EL-ASLO8-M-28W




Dimensions:

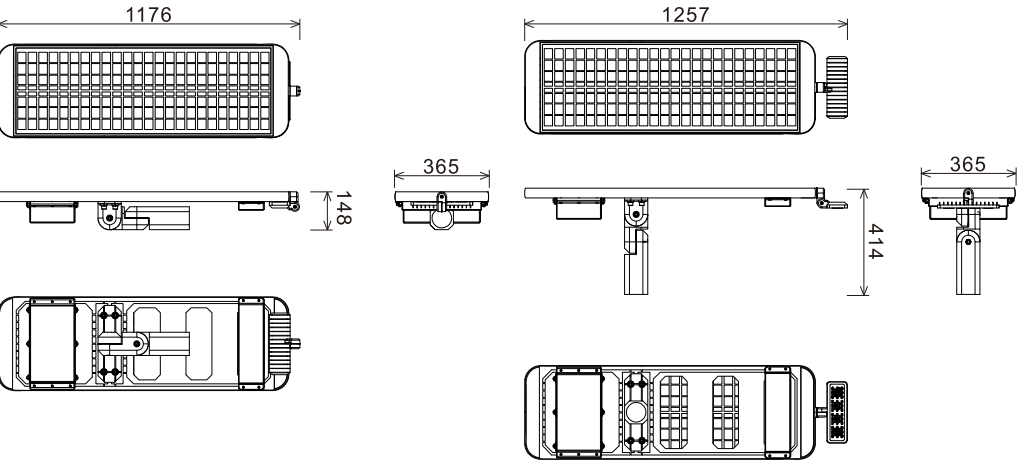


Characteristics



Universal angle adjustable
Mounting adaptor



Universal angle adjustable
LED module



Modular designed power pack
Modular designed controller box

Features:

- The first integrated die-casting aluminum made design, a very firm structure to bear the ambient force
- High luminous efficiency 160lm/w
- MPPT control system
- Superior Lithium-ionLi Fepo4 battery, safe and long lifespan
- Full power operation time≥7hours/night
- Modular chambers design, easy for replacement and maintenance
- Two-in-one function design, can change the LED module to monitoring camera

Specifications:

Model	EL-ASLO8M
Light source	SMD LED Module
Power	28W
Luminaire flux	4500LM <small>*Light flux based on 5000K and Ra70</small>
Luminaire efficacy	160lm/w <small>*Light effect based on 5000K and Ra70</small>
Solar panel	50w
Battery	576wh Lithium-ionLi Fepo4 battery
Operating time	Full power ≥7 hours Time interval dimming ≥12 hours, Intelligent mode 2-3 days <small>*Operation time above are calculated based on average daily sunshine time >5hrs</small>
Solar panel angle adjustment	±30°
LED module angle adjustment	±30°
Color	Grey/ Black
Tightness level	IP66